




PRODUCT FEATURES

- Individual premium crescent cube.
- Protected by HoshiGuard Antimicrobial Agent.
- CycleSaver® technology includes a double-sided evaporator, uniquely crafted in stainless steel, which produces ice on both sides, resulting in more ice in less amount of time.
- EverCheck Control board with audible alarm and diagnostic features, designed to assist services technicians in diagnosing problems.
- Durable stainless-steel exterior.
- Easily removable & cleanable air filters on front panel.
- Ice storage bin, top kit and water filter sold separately.



TECHNICAL DRAWING

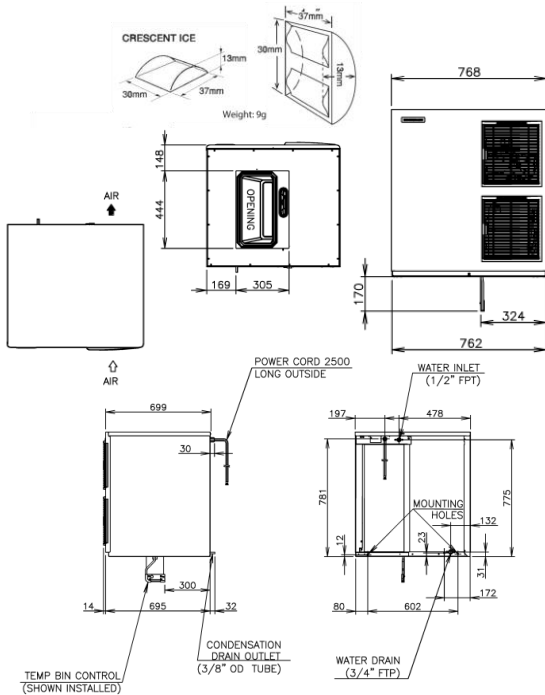

PRODUCT SPECIFICATION

Production Capacity / 24hrs	Approx. 480kg @ 21°C Air temp; 15°C Water Approx. 380kg @ 32°C Air temp; 21°C Water
Recommended Storage Bins	B-501 SA B-801 SA B-1300 SS B-1500 SS
Freeze Cycle Time	Approx. 24 Min (At. 21°C Air ; 15°C Water)
Ice Production / cycle	Approx. 9.7kg / 960pcs
Dimensions	762mm (W) x 695mm (D) x 825mm (H)
Cooling	Air
Weight Net/Gross (kg)	122/142
Refrigeration System	Forced Air Circulation
AC Supply Voltage	1 PHASE 220-240V 50Hz / 15amp Plug
Amperage	Running: 11.2A Starting: 55A
Refrigerant Charge	R404A/1,400g
Operating Conditions:	
Ambient Temp	7-38°C
Water Supply Temp	7-32°C
Water Supply Pressure	0.07-0.78MPa (0.7-7.8bar)
Voltage Range	198 - 254V
Electrical consumption	1,850W (AT. 32°C; WT 21°C)
Water consumption / 24hrs	Approx. 1.02m3/d (AT. 21°C; WT 15°C)



For free 6 month extended warranty, register online within 4 weeks of purchase date.
hoshizaki.com.au

INSTALLATION REQUIREMENTS

- Qualified plumber required for installation.
- Included accessories & fittings pack can be found behind front panel.
- Allow 30cm clearance at rear, sides and top for proper air circulation and ease of maintenance.
- Install bin control switch according to installation manual.
- Hoshizaki recommends the use of a compatible water filter to prevent non-warrantable scale & sediment complications

*Refer to manual for full installation & maintenance requirements.

