

Undercounter Range

Simple. Robust.
CLASSEQ

The power of simple.

Driving innovation.



01 Easy selection.
Only two models.


02 Easy installation.
Commissioned as a glass or dishwasher and operational in just 10 minutes.

03 Easy to use.
Press "on", press "start", wash.


04 Easy cleaning.
Washing fields and filters can be removed with one hand.

05 Easy maintenance.
Lower service costs and error diagnosis via App.

C400

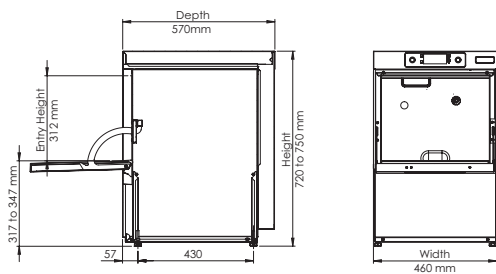

C500

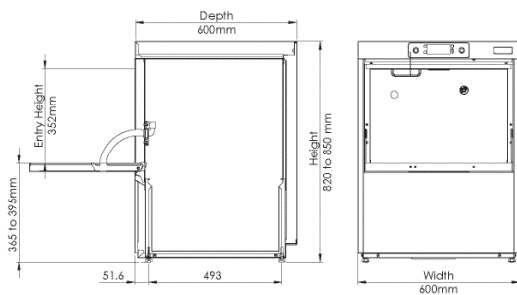

Hydraulics

	C400	C500
Water supply connection	G3/4"	G3/4"
Required water pressure min/max	1-10 bar	1-10 bar
Incoming Water temperature min/max	4-55°C	4-55°C
Drain size ø	40mm	40mm

Electrical

Amps required	15 A (single phase)	15 A (single phase)
Standard operating voltage*	220-240V/1N~/50HZ	220-240V/1N~/50HZ
Total connected load	2.5 kW	2.5 kW

*Onsite conversion to 15A, 380-415V/3N~/50 HZ is possible.

Performance

Wash tank capacity	9.5L	15L
Clear entry height	312mm	352mm
Water consumption per cycle*	2.1-2.75L	2.1-2.75L
Theoretical max. racks per hour - Dish	30 / 20 / 12	30 / 20 / 12
Theoretical max. racks per hour - Glass	40 / 30	40 / 30
Wash temperature	62°C	62°C
Rinse temperature Glass / Dish	70° / 80°	70° / 85°

*Under ideal conditions

Product Code

C400	851V0003
C500	853V0003

Simple. Robust.
CLASSEQ



Scan for more information.