

Product Information

- Refrigerated GN 1/3 size service well with cold air blowing above and below ingredient pans. Includes under counter refrigerated storage below
- Sliding perspex lids for blown well
- Designed to operate at ambient temperatures up to 40°C with lid on, 32°C with lid off
- Digital temperature display and control
- Designed to operate between 2°C – 5°C
- Full-length, back mounted, coated evaporator coil for uniform cooling across the entire well
- Removable filter for easy cleaning
- Fully self-contained
- Supplied on standard and lockable castors for ease of cleaning
- Cutting board, 5 x 1/3 GN Pans (100mm deep) supplied as standard
- 2 and 3 door models also available




Designed & Engineered in Australia to meet Australian Standards
24 Months on-site parts and labour warranty

Specifications

Model	AXR.SW.1025
W x D x H (mm)	1025 x 843 x 915
Weight	112kg
Packed Dimensions (mm)	1075 x 880 x 965
Packed Weight	125kg
Capacity	5 x 1/3GN
Operation	2°C - 5°C
Refrigerant	R290
Max Ambient	40°C
Total Connected Load	0.59kW
Electrical Connection	10+N+E 230VAC / 50Hz 10A plug & lead

Legend

A Electrical Connection

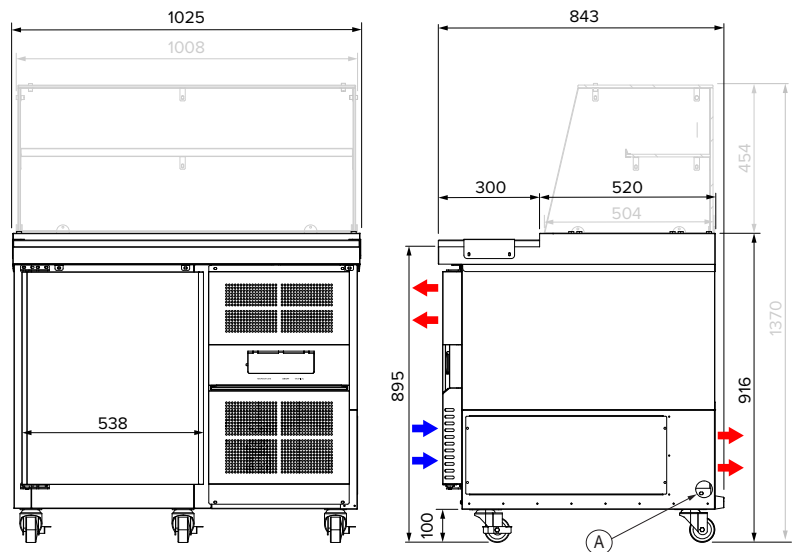

Accessories

Frameless Glass Gantry	AXR.SW.1025.GAN
Gantry Dimensions (mm)	1007 x 500 x 450