

MANUFACTURER:	Roband Australia
CATEGORY:	Freestanding
MODEL / DESC:	Electric Fryers
ORIGIN:	Australia
WARRANTY: (refer to website)	1 yr labour, 2 yr parts, 5 yr fryer tanks



Freestanding Electric Fryers

Energy Efficient | High Performance | Longevity | Easy to Clean

The Austheat 3 phase electric fryers are ideal for fast turnaround and high-volume production of fried foods in Stadiums, Aged Care, Mining, Fish & Chip Shops, Restaurants, Cafés & QSR's. Locally made in Australia by Roband. They are designed to work either as a stand alone machine or alongside the Austheat Hotplate/Grill in a modular configuration.

Available in Standard or Rapid Recovery (R) models.



AF812

AF822

AF813

FEATURES

AF812 & AF812R

- Single pan, includes two baskets, 33 litre oil capacity

AF813 & AF813R

- Single pan, includes three baskets, 43 litre oil capacity

AF822

- Double pan, includes two baskets, 2 x 15 litre oil capacity
- Two tanks with individual controls allows for separation of flavours and ability to shut down one tank in quieter periods

All Models

- High performance; high output with fast recovery
- Easy to clean – elements swing out and up in seconds, providing access to a smooth open tank for easy cleaning
- Dual control thermostats enabling easy switching between cooking & idle standby settings. Second thermostat doubles as a back up in the unlikely event of a thermostat failure
- Heat generated directly into the oil to reduce ambient impact on the kitchen environment/staff
- No gas flame for a "cleaner" working environment
- Electric immersion elements can outlast gas burners and have lower replacement costs
- Safety thermostat with manual reset over-temp safety cut-outs
- Castors on the rear and adjustable legs at the front come as standard. Baskets & pan lids included

SPECIFICATIONS


MODEL	BASKETS No.	TOTAL POWER	CURRENT Amps (per phase)	PHASE	PRODUCT DIMENSIONS w x d x h (mm)	COOKING TIME # (per 1.5 kg)	HOURLY OUTPUT # (frozen)	HEAT UP TIME (to 180 °C)
SINGLE TANK								
AF812	2	14.6 kW	21.6	3 (+N)	455 x 830 x 1075	2-3 mins	32 kg	10 mins
AF812R	2	16.7 kW	24.6	3 (+N)	455 x 830 x 1075	2-3 mins	35 kg	9 mins
AF813	3	16.7 kW	24.6	3 (+N)	600 x 830 x 1075	2-3 mins	40 kg	10 mins
AF813R	3	21.5 kW	31.6	3 (+N)	600 x 830 x 1075	2-3 mins	45 kg	8.5 mins
DOUBLE TANK								
AF822	2	14.1 kW	21.4	3 (+N)	455 x 830 x 1075	2-3 mins	32 kg	10 mins

#Basket load based on thick, thawed chips.


DIMENSIONS

All measurements are in millimetres ~


AF812 & AF812R

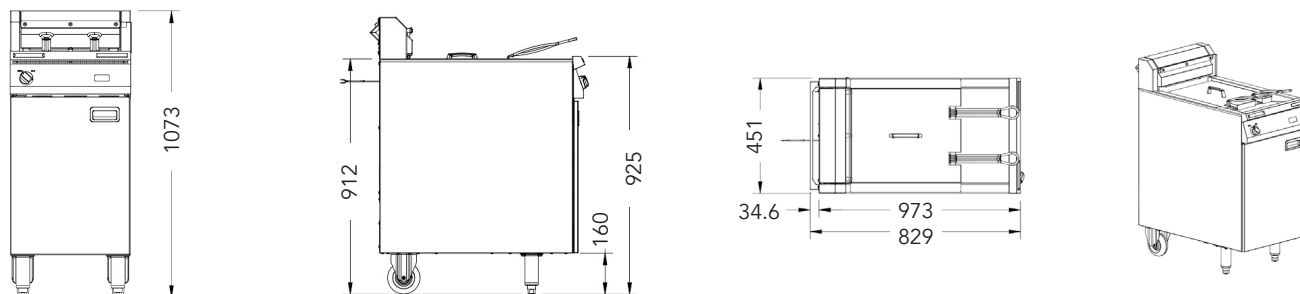

AF813 & AF813R

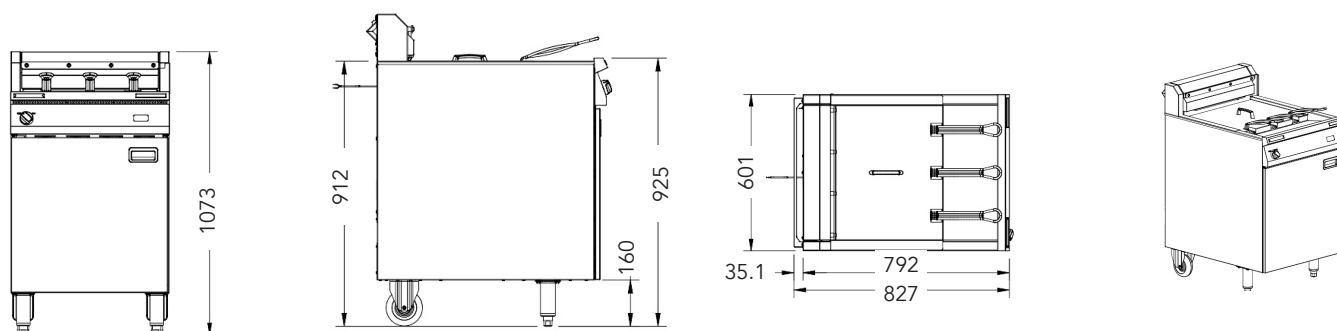

AF822

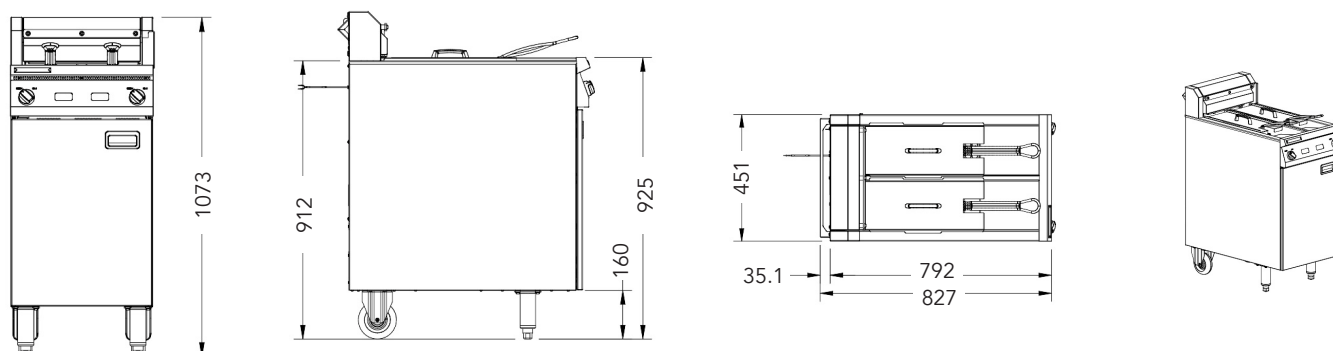

~Line drawings not to scale.

December 2025

AUSTHEAT