
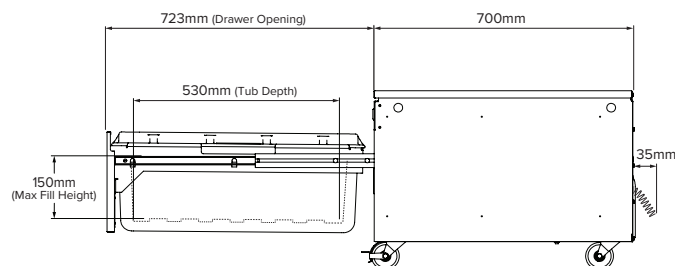


Product Information

- Modular refrigerated drawer system, providing bulk storage in a range of different configurations for extreme versatility (can be configured as a worktop or undercounter system)
- Energy efficient, insulated containers adopt 'hold the cold' technology when drawer is opened
- Low velocity cooling ensures stable temperatures and exceptional humidity control, prolonging shelf life by preventing food dehydration
- Precise temperature control in 1°C increments with adjustable digital temperature controller (15°C - -22°C)
- Designed to operate in ambient temperatures up to 40°C
- External drawer runners for hygiene and ease of cleaning. Each drawer is supplied with a divider and features keyed alike locks for added security.
- Drawer load capacity maximum 30kg
- Low maintenance internal condenser
- Adjustable levelling castors, rollers and legs to ensure optimal operation. **Must be installed level with a maximum fall of 5mm to the rear**
- 24 month parts and labour warranty

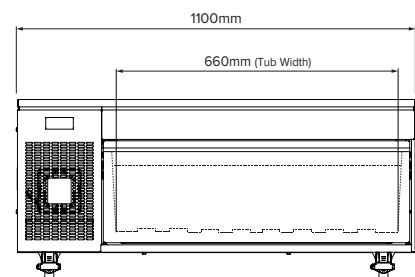



General Specifications

Capacity	65 Litres 2 x 100mm deep 1/1 GN pans or 4 x 65mm deep 1/1 GN pans	
Natural Refrigerant	R600a	
Climate Class	4	
Total Connected Load	0.38kW	
Electrical Connection	10+N+E 230VAC / 50Hz 10A plug & lead	
Energy Usage kW/24hrs	Chiller	Freezer
	0.99kW	2.35kW
Running Current	1.2A	0.7A
Heat Rejection	2.28kW	5.41kW
Db Rating	50.6 - 54.2	



Configurations

Models	Base Configuration	Top Configuration	W x D x H (mm)	Weight	Max Loading Weight (on top of unit)	Packed Dimensions (mm)	Packed Weight
VLS1.PT	Plinth Base	Cover Top	1100 x 700 x 361	87 kg	0 kg	1220 x 770 x 607	125 kg
VLS1.PHS	Plinth Base	Heatshield Top	1100 x 700 x 411	97 kg	45 kg	1220 x 770 x 659	144 kg
VLS1.RT	Rollers	Cover Top	1100 x 700 x 392	88 kg	0 kg	1220 x 770 x 607	125 kg
VLS1.CW	Standard Castor	Solid Work Top	1100 x 700 x 444	97 kg	45 kg	1220 x 770 x 659	133 kg
VLS1.CHS	Standard Castor	Heatshield Top	1100 x 700 x 485	107 kg	45 kg	1220 x 770 x 700	144 kg
VLS1.LHS	Adjustable Legs	Heatshield Top	1100 x 700 x 539	107 kg	45 kg	1220 x 770 x 754	143 kg
VLS1.HCHS	High Castor	Heatshield Top	1100 x 700 x 567	109 kg	45 kg	1220 x 770 x 782	146 kg

Base Options:



Top Options:



NOTE: Adande units are not designed as a dedicated servery cabinet for delicate products such as Ice-cream/Sorbet/Gelato/frozen Yoghurt and Frozen berries. For optimal energy efficiency and temperature stability the drawers should always be closed firmly and as quickly as possible during use.

***INSTALLATION NOTE:** Hard-wired, gas, live fuel and plumbed equipment **cannot** be directly installed onto the Adande unit. This equipment must be installed above the Adande unit using an independent equipment stand. Installation must be non-fixed to allow service access. Adande units when installed adjacent to a gas fired cooking equipment, should follow the clearance guidelines detailed in the equipment installation manual for that particular piece of equipment.