

## Automatic rack-type dishwasher, capacity up to 200 racks, 3.600 plates or 7.200 glasses per hour

500

L 480




## Connections mirrorwise for R/L working direction

Machine shown with optional D-90-15 dryer.

## 4 1475 900--600<sup>[3</sup> 590 1350 500 210 (2) 380 1

## **Product Advantages:**

- Single rinse system 260 l/h
- "E"-pre-wash with 0.27kw pump and removable scrap tray
- Optimum hygiene safety deep drawn tank
- Two speed 135/200 racks / hr
- Optional heat recovery for lower operating costs
- Stainless steel 1.5kW main wash pump
- Including main switch and emergency stop
- Drop-In wash arms with no end caps
- Colour-coded cleaning assistance

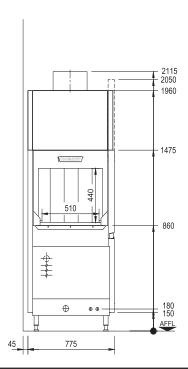

Warm water connection (filling) R 3/4" 0 - 3°d, (1,4mmol/l); 55-65 degrees Celcius 1.1 For machine operation Warm water connection for machine without heat recovery Cold water connection for machine with heat recovery R 3/4" 0 - 3°d, (1,4mmol/l); max. 260 l/h; demineralized water blended to have appr. 80 µs/cm Drain DN 50 415/50/3 N+E Power supply Without dryer - 28.7kW / With dryer (D90) - 32.3kW approx. 600m³/hr Exhaust Main switch Table height 900mm

Machine height +/- 25mm feet adjustable

820